

An aerial photograph of a rural landscape. In the foreground, there are rows of mature corn plants in a field. To the right, a dirt road or path runs through the landscape. In the background, there are rolling hills covered with trees displaying vibrant autumn foliage in shades of yellow, orange, and green. The sky is a clear, bright blue.

# CAPTURE

Phosphorus  
***Captured.***

Water Quality  
***Restored.***

**PRODUCT OVERVIEW**



# INTRODUCTION

The Compact Agricultural Phosphorus Treatment Structure, or CAPTURE, is a modular technology solution for removing soluble phosphorus from agricultural tile drainage and overland runoff before it discharges to local surface waters.

The CAPTURE system was designed and created by **Kieser & Associates, LLC (K&A)** with financial support from the Great Lakes Protection Fund. The system is Patent Pending.

\*\*\*The design and engineering factors of this document are the property of the Great Lakes Protection Fund. Reproduction or diversion of this information, or the design and engineering factors herein is prohibited without express consent of the Great Lakes Protection Fund.

CREATED AND PRESENTED BY:

**KIESER & ASSOCIATES**  
ENVIRONMENTAL SCIENCE & ENGINEERING





# THE PROBLEM WITH PHOSPHORUS

Phosphorus (P) is a critical nutrient for all forms of life. Agricultural production and managed urban landscapes often require or receive additional phosphorus inputs in the form of fertilizers. While plants may use the majority of added fertilizer, some of it is inevitably lost to surface waters as rain carries both dissolved and particulate P in drainage or runoff. Phosphorus-laden drainage eventually reaches nearby streams and lakes via soil erosion, agricultural tile drains, or city stormwater system discharges.

While phosphorus is readily available to terrestrial plants, in aquatic systems it is often referred to as the “limiting nutrient.” When agricultural and urban runoff enter aquatic systems, plant and algae growth has the potential to spiral to nuisance levels. If cyanobacteria are present as harmful algal blooms (HABs), these conditions can affect drinking water supplies and create hazardous exposures to humans, livestock, pets and wildlife.

Mitigating phosphorus losses from the landscape typically requires conservation practices and/or operational management in agriculture, and Best Management Practices in urban environments. Such practices can be efficient for capturing sediment-attached phosphorus (particulate P), however few of these address dissolved phosphorus, the most readily available form of P that causes water quality impairments.





# HOW CAPTURE WORKS

CAPTURE™ was designed to fill the technology gap for treating soluble P. Developed with cost and ease of operation at the forefront, CAPTURE™ boxes can treat large volumes of runoff over a period of hours to days when coupled with hydraulic controls such as drainage water management (DWM) structures.



## THE CAPTURE SYSTEM OFFERS:

- 1** A small installation footprint
- 2** >40% dissolved P removal from tile flows & runoff
- 3** Ease of installation
- 4** Managed hydraulics to avoid tile and field flooding
- 5** Easily replaceable filter media, optimizing P capture while enhancing P recovery and reuse

Phosphorus removal systems work by directing phosphorus-laden runoff or drainage water into a structure containing phosphorus adsorbing filter media. Larger non-modular installations designed for less frequent replacement intervals result in higher installation costs, larger installation footprints, and challenging maintenance issues when media must be replaced. As these traditional soluble P removal systems do not provide a direct benefit to farmers, adoption thus far has been limited. CAPTURE™ aims to improve adoption by minimizing costs, streamlining installation, and enhancing P recovery opportunities.



# SPECIFICATIONS

CAPTure™ box designs have evolved since their first prototype. The current iteration is manufactured by Agri Drain Corporation for K&A; specifications are listed in Table 1. Future iterations may differ slightly as system size and weight are optimized. Treatment assumptions of binding capacity and treatment volume before media replacement are given for an activated aluminum product. The CAPTure™ system can accommodate many different media types, which will affect treatment performance values. This “media neutral” approach ensures that the system can see improved performance as new filter media become available.

**A SINGLE 4' X 5' CAPTURE BOX CAN TREAT 20-25 ACRES OF AGRICULTURAL DRAINAGE.**



**TABLE 1.**

Important CAPTure™ dimensions and treatment specifications.

Items with \* indicate assumptions using K&A’s recommended activated aluminum filter media with a cumulative phosphorus removal target of 40-50% and an influent phosphorus concentration of 200 ug/L.

CAPTURE DIMENSIONS	VALUE
Box Length	60"
Box Width	48"
Box Height	32"
Box Weight (Empty)	450 lbs
Current Box Manufacturer	Agri Drain
Media Weight per Box*	640 lbs
Treatment Drainage Area*	20-25 ac
Max Treament Flow Rate*	100 GPM



# INSTALLATION BASICS

CAPTURE™ box installations require hydraulic controls to ensure an optimal 60-second contact time for efficient media capture of soluble P. CAPTURE™ boxes can be installed on drain tile outlets with drainage water management (DWM) structures, as well as with detention basins with outlet flow controls (Figure 3). These structures/basins reduce sediment transmission into boxes while accommodating box treatment flows of up to 100 GPM. When drainage areas exceed 20-25 acres, multiple CAPTURE™ boxes can be installed in parallel (Figure 4).

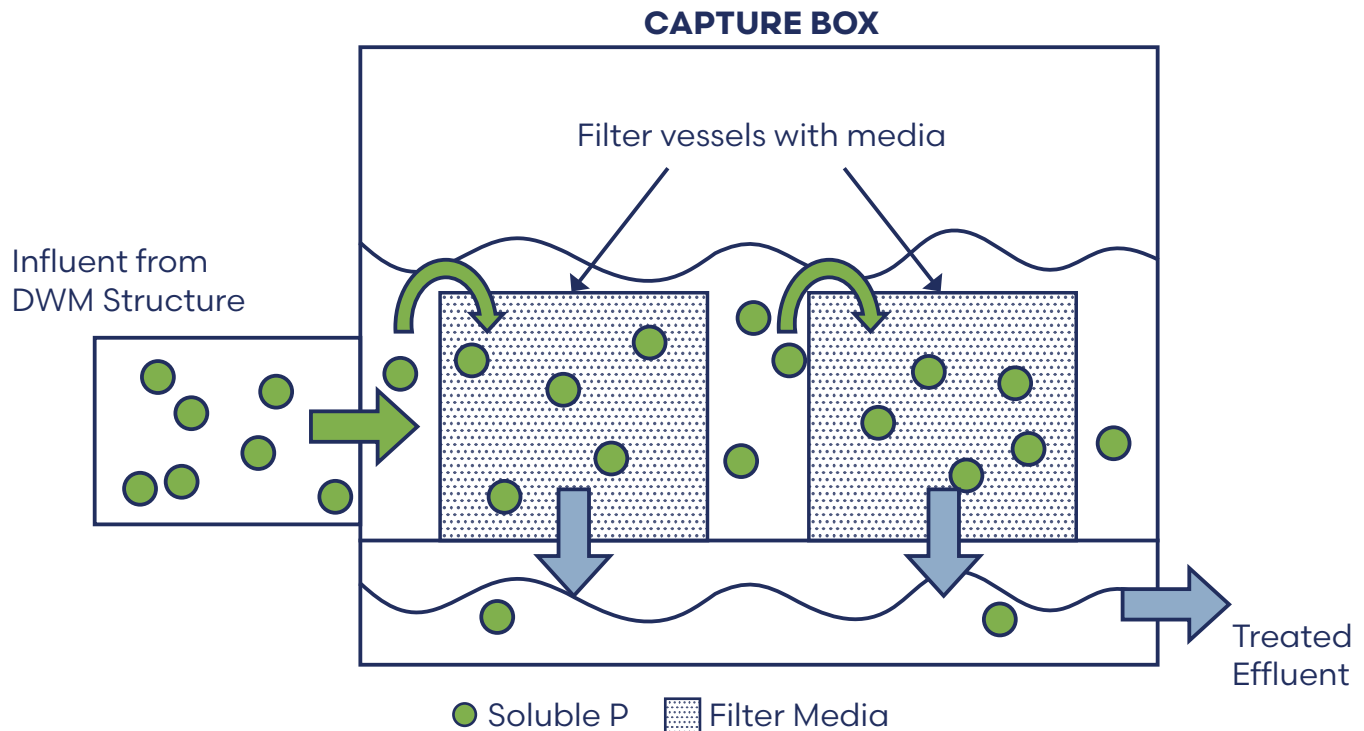


Figure 3. Illustration of phosphorus-laden water moving through a CAPTURE™ box.



Figure 4. CAPTURE™ installation with boxes in parallel for runoff and tile treatment of 100 acres.  
(See site installation information at: <https://youtu.be/POPVedDvZg8?si=EO4diP9Qpyie5a3e&t=127>.)



# MAINTENANCE

**CAPTURE™ was designed from the ground up to be easy to install and maintain.**

**A CAPTURE™ installation requires filter media replacement once per year under “typical” conditions for:**

- >40% phosphorus capture
- Soluble phosphorus loading rates of 10 pounds per year (or 0.5 lb/ac.yr-1) for the recommended drainage area (20-25 acres per CAPTURE™ box).

Media replacement intervals will vary depending on site-specific treatment targets and loading rates.

No matter the replacement interval, swapping out CAPTURE™ filter media is easy. Each CAPTURE™ box contains a series of filter vessels (typically 16), inside of which is a filter media bag (Figure 5). To replace the filter media, the old bag is removed and replaced with a new one. Filter bags weigh less than 40 pounds each and can be easily moved by hand.

The ability to readily exchange filter media addresses one of the primary maintenance challenges with other phosphorus removal systems – replacement of sediment-clogged, spent media. By hydraulically managing CAPTURE™ box influent and using replaceable filter media, the media is reserved for soluble P capture.



Figure 5. CAPTURE™ box interior with filter vessels and filter media bags.



# CAPTURE vs. OTHER PRACTICES

CAPTURE™ is an alternative to both traditional conservation practices and standard phosphorus removal systems. Traditional conservation practices include options such as cover crops, buffer strips, tillage management, and detention basins to control phosphorus losses in agricultural settings. These practices, however, are only effective for removing particulate phosphorus, of which up to one-third may ultimately become available for plant uptake in the aquatic environment (i.e., bioavailable).

Both CAPTURE™ and standard phosphorus removal systems target soluble phosphorus, nearly 100% of which is bioavailable. While standard phosphorus removal systems can be large, expensive to install, difficult to maintain, and susceptible to early media failure, CAPTURE™ eliminates these issues with its replaceable filter design.

CAPTURE™ is competitive with other conservation practices on a per-pound basis of bioavailable phosphorus removal utilizing currently available activated aluminum filter media (Figure 6). K&A continues to examine options for other effective filter media to improve cost-effectiveness.

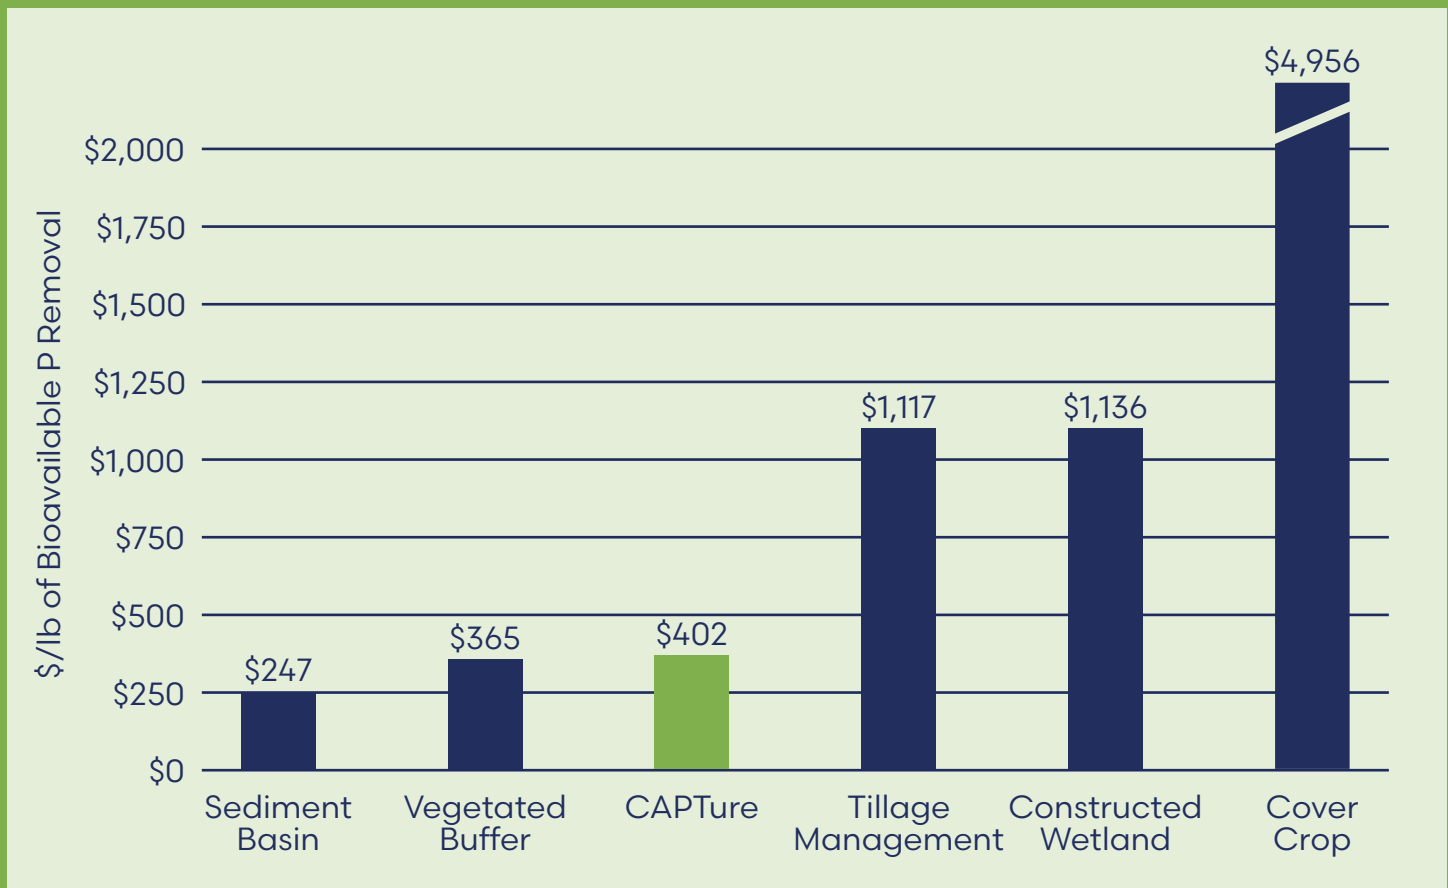


Figure 6. Cost-effectiveness of bioavailable P removal for different phosphorus-targeting practices.



# TESTING & FIELD STUDY RESULTS

CAPTURE™ has been tested both in the field and in laboratory settings. Laboratory testing has focused on bench-scale media sorption capacity, while field testing has focused on in-field, proof-of-concept. The CAPTURE™ system is media neutral, but criteria for optimal media selection is short-contact time, high absorption capacity, availability, and cost. Activated aluminum products have emerged as the most cost-effective, long-lasting media of choice at this time. While further media options are in the works, Figure 7 illustrates CAPTURE™ performance with currently available activated aluminum products.

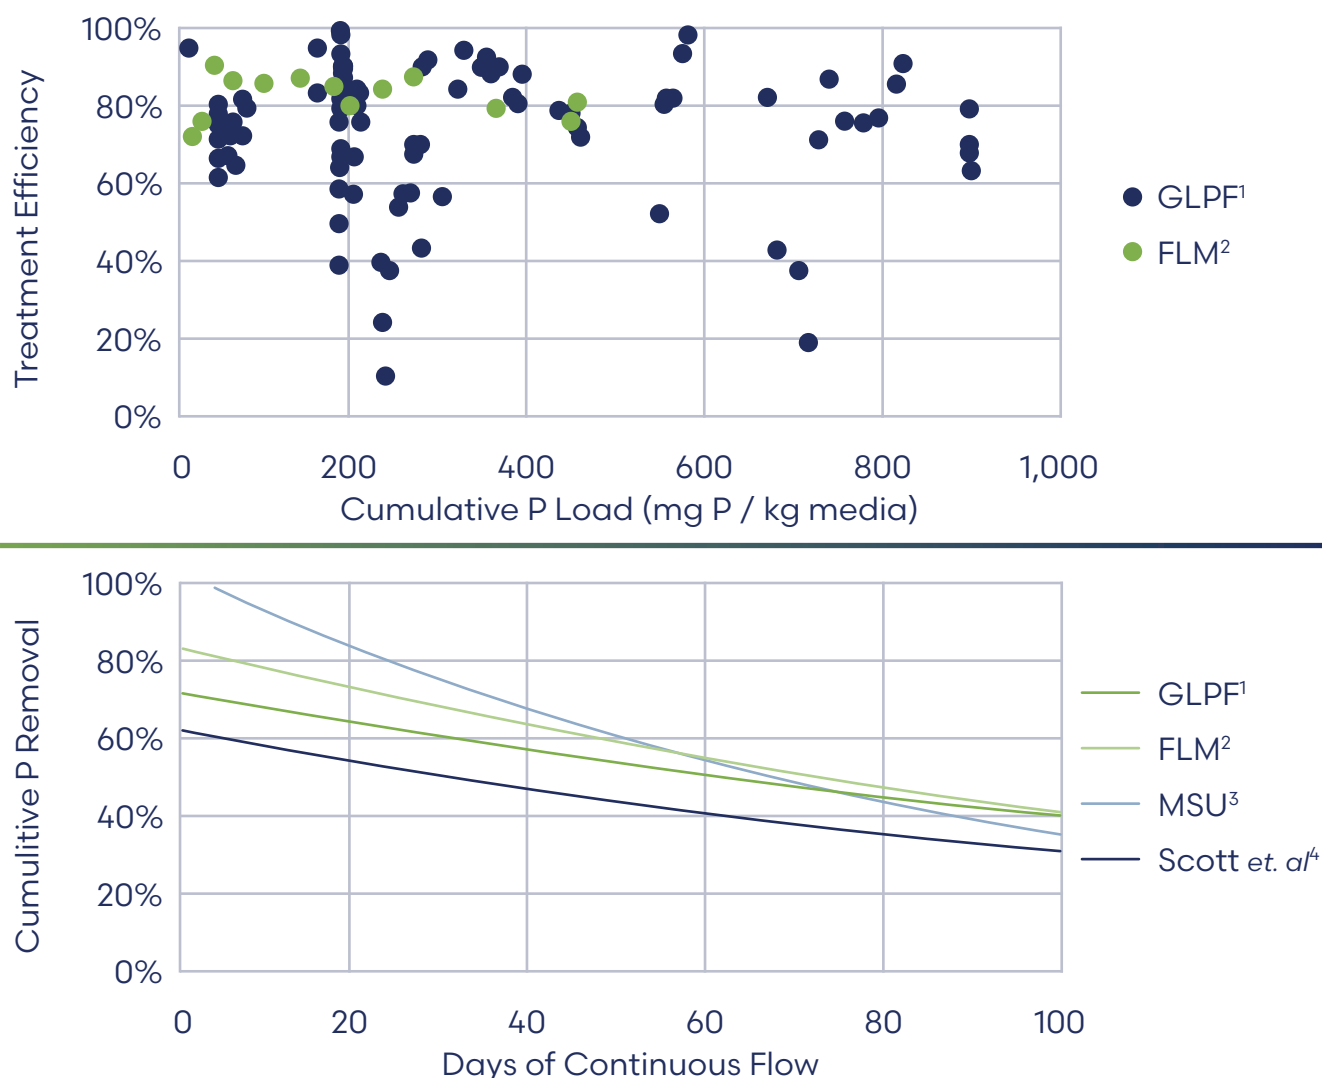


Figure 7. Field testing results (top) and extrapolated performance life (bottom). "Days of Continuous Flow" assumes a single CAPTURE™ box receiving an average 45 GPM constant flow containing 200 µg/L of soluble phosphorus.

1. [GLPF field test](#).

2. [FLM field test](#).

3. MSU lab filter media sorption capacity testing. See note 1 for project link.

4. SPC Scott, I., J. Penn, C., & Huang, C. H. (2020). Development of a regeneration technique for aluminum-rich and iron-rich phosphorus sorption materials. *Water*, 12(6), 1784.



**For CAPTure product and application  
information, contact K&A:**

Kieser & Associates, LLC  
[www.kieser-associates.com](http://www.kieser-associates.com)  
269.344.7117

Our unique team of scientists and engineers investigates and applies creative solutions for environmental problems while honoring integrity, valuing relationships, and fostering innovation. We specialize in:

Environmental Engineering  
Lake & Watershed Management  
Environmental Markets  
Regulatory Compliance

**CAPTURE**

Kalamazoo, MI | 269.344.7117 | [captured.eco](http://captured.eco)